

# MS1

## LABELLER FOR SEAL SERIES "MS1"

### MAIN FEATURES



- Structure and carpentry stainless steel and aluminum.
- Motorized belt with 3 closed loops, 2 from 150X600 and 1 from 150x450.
- Brushless motor and drive boards.
- Adjustable speed from 10 to 70 m/min.
- Carter applicator made entirely of stainless steel.
- **Label application to scrap and sucked on two or three sides of the package, complete with a pressure regulator with air filter and pressure gauge.**
- Print width: 2", 3", 4".
- Print speed: 300 mm/s.
- Print mode: direct thermal (optional thermal transfer).
- Resolution: 200 dpi (300 dpi optional).
- Photocell detection product for the activation of the cycle pose.
- Positioner column entirely in stainless steel, horizontal and vertical movement on bearings.
- Communication ports: RS232 serial port, USB.
- Roll size, outer diameter: 220 mm max, internal diameter: 45 mm.
- Power supply voltage: 230 Vac +/- 5%; 50-60 Hz.

### OPTIONS ON REQUEST

- Pneumatic arm to change the direction of the product.

### INTERFACE ON REQUEST

- Ethernet/Wi-Fi.

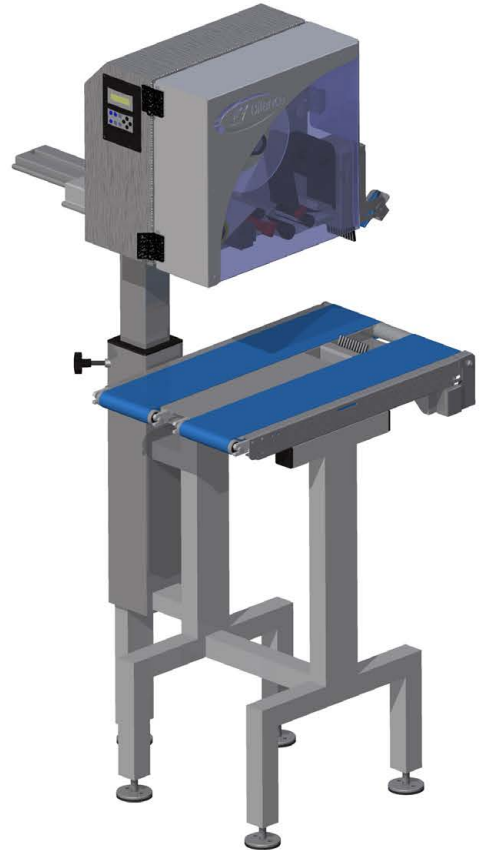

#### Postadress:

TRÄDGÅRDSTEKNIK AB  
Helsingborgsvägen 578, Varalöv  
262 96 ÄNGELHOLM

Telefon : 0431-222 90  
Bg.nr : 5743-7980  
Org.nr : 556409-6120

#### URL:

[www.tradgardsteknik.se](http://www.tradgardsteknik.se)  
E-postadress:  
[info@tradgardsteknik.se](mailto:info@tradgardsteknik.se)